


italbedis®

WATER, NATURALLY. SINCE 1989.

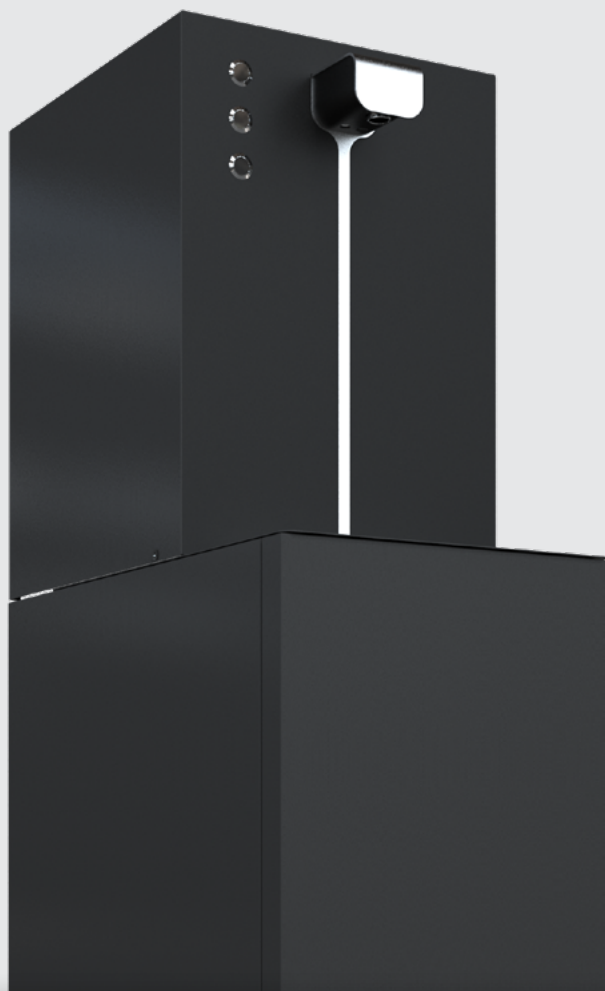

Office Line **FLUX 30 OFFICE**

WATER DISPENSER WITH AN EXCLUSIVE AND ORIGINAL DESIGN, **ADAPTABLE TO ANY LOCATION AND ACTIVITY.**

COLUMN WATERCOOLER

FLUX 30 Office



Technology and design Made in Italy, a practical and functional office dispenser. This water dispenser combines aesthetics with practicality: it can be placed on its matching cabinet, creating a column configuration. Essential and functional, Flux 30 OFFICE connects to the water supply, offering high performance. The ideal cooler for those who want to combine elegance and practicality.

Flux 30 OFFICE is also available in an elegant black version. As with the white version, the cabinet is designed to hold the CO2 cylinder and filter.

The equipment comes standard with a flood protection system and the UV LED Spider bactericidal system.



Available colors



Dispenser	Production of cooled water	Production of hot water	Boiler capacity	Cooling	Compressor power	Carbonator pump	Carbonator capacity	PPB H2	Weight	Sizes (LxPxH)*
Flux 30 Plus	30 l/h	-		Direct exchange	1/10 Hp	150 l/h	1,5 l		22 kg	29x33x41 cm
Flux 30 Natural	30 l/h	-		Direct exchange	1/10 Hp	Not present	-		18 kg	29x33x41 cm
Flux 30 Plus HOT	30 l/h	16 l/h	0,8 l	Direct exchange	1/10 Hp	150 l/h	1,5 l		23 kg	29x33x41 cm
Flux 30 Natural HOT	30 l/h	16 l/h	0,8 l	Direct exchange	1/10 Hp	Not present	-		19 kg	29x33x41 cm
Flux 30 Plus IDRO	30 l/h			Direct exchange	1/10 Hp	150 l/h	1,5 l	800-1600	23 kg	29x33x41 cm

*Drip tray included

Flux Office 30 total dimension (LxPxH)

29x48x123 cm

OTHER TECHNICAL FEATURES

- Body material: painted sheet metal
- Water supply pressure: 2-3.5 bar
- Operating ambient temperature: 10 - 35° C
- Water supply temperature (min-max): 10-25° C
- Electrical supply: 220 V - 50 Hz single-phase
- Cold water temperature (min-max): 5 - 13° C
- Power consumption: 250 W / 80 W

*Test condition: water in 20 °C - amb. temperature 25 °C

USABLE WITH REFINER
REFINER 250 • 350 • 500USABLE ONLY WITH
DRINKING WATER
R290
NATURAL REFRIGERANT GAS
Vertical operation. **MAX inlet temperature:** 35°C. **MAX operating pressure:** 3,5 bar

NOTE: this equipment requires regular maintenance periodically to ensure the requirements of potability of the drinking water treated and maintenance improvements as declared by the producer. Do not use with microbiologically dangerous water. After long periods of inactivity (3 / 4 week) to keep it carefully sanitizing or provide for the replacement of the filter.